




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04L 27/26	A1	(11) International Publication Number: WO 97/04572 (43) International Publication Date: 6 February 1997 (06.02.97)
(21) International Application Number: PCT/SE96/00906 (22) International Filing Date: 3 July 1996 (03.07.96) (30) Priority Data: 08/502,633 14 July 1995 (14.07.95) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: GUDMUNDSON, Perols, Leif, Mikael; Kolding- gatan 4, S-164 46 Kista (SE). BRISMARK, Lars, Gustav; Minkvägen 34, S-191 39 Sollentuna (SE). ANDERSSON, Per-Olof, Älvdalsvägen 63, S-165 75 Hässelby (SE). (74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Eric- sson, Patent and Trademark Dept., S-126 25 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>

(54) Title: PULSE SHAPING FOR MULTICARRIER MODULATION**(57) Abstract**

A method and system for data transmission in an orthogonal frequency division multiplexed (OFDM) system is provided. In the invention each of a plurality of data symbols C_k , having a symbol period T , are modulated (404) onto one of a plurality of subcarriers comprising a first data signal. The first data signal is then multiplied (406) by a pulse-shaping function over the period T to generate a second data signal. The second data signal is then modulated (412) and transmitted on a system carrier over a communications channel (414) of the OFDM system.

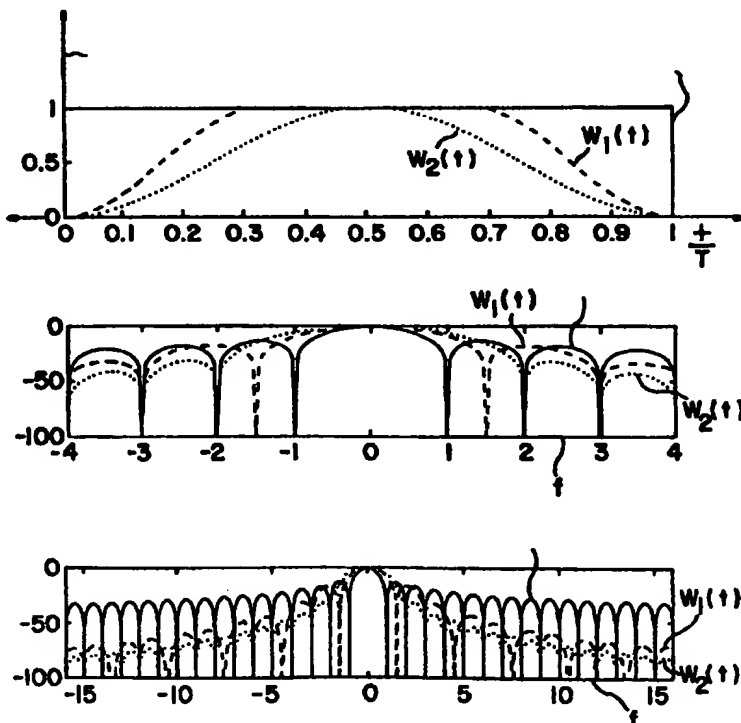

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

PULSE SHAPING FOR MULTICARRIER MODULATION

BACKGROUND OF THE INVENTION

5 Field of the Invention

This invention relates to telecommunications systems and, more particularly, to a method and system of pulse shaping for data transmission in an orthogonal frequency division multiplexed (OFDM) system.

10

History of the Prior Art

In radio telecommunications systems a common technique for transmitting information is to divide the information into separate units and then transmit each unit on a separate RF subcarrier. The separate units can then be received from each subcarrier at a receiver and the original information can be reconstructed. This type of technique for transmitting is known as multicarrier modulation (MCM).

20 Orthogonal frequency division multiplexing (OFDM) is a particular method of MCM. An OFDM signal consists of a number of subcarriers multiplexed together, each subcarrier at a different frequency and each modulated by a signal the level of which varies discretely rather than continuously.

25 Because the level of the modulating signal varies discretely, the power spectrum of each subcarrier follows a $(\sin x/x)^2$ distribution. For an OFDM system, the subcarrier frequencies f_k , $k=0, \dots, N-1$, are defined so
30 the subcarriers are orthogonal, i.e., the power spectra of each of the subcarriers is zero at the frequencies of each of the other subcarriers.

35 A set of data symbols C_k , wherein $k=0, \dots, N-1$, (i.e., complex numbers representing the information to be transmitted) is used to modulate the N subcarriers in an OFDM system. Each data symbol C_k modulates a subcarrier at a given frequency f_k . The particular way in which the

-2-

information is represented as a complex number depends on the modulation method. Common modulation methods include phase shift keying (PSK), differential phase shift keying (DPSK), quadrature phase shift keying (QPSK) and
 5 differential quadrature phase shift keying (DQPSK).

The subcarrier frequencies, f_k , $k=0, \dots, N-1$, for N subcarriers in an OFDM system are defined by the set of base functions:

$$\Psi_k(t) = \begin{cases} e^{j2\pi f_k t} & 0 \leq t < T \\ 0 & \text{otherwise} \end{cases}$$

10 The smallest difference between two frequencies f_i and f_j , such that the two base functions are orthogonal, is $1/T$, so the subcarrier frequencies are defined as:

$$f_k = f_c + \frac{k}{T}, \text{ wherein } k=0, \dots, N-1$$

and wherein f_c is the system carrier frequency and T is the symbol time (the time duration of a data symbol). The subcarrier separation is then defined as $f_o = 1/T$.

15 The sum of all N signals is called an OFDM signal. The transmitted signal in the time interval $[0-T]$ can be represented as:

$$x(t) = \sum_{k=0}^{N-1} C_k \Psi_k(t)$$

If $y(t)$ is the signal received at the receiver, the data can be detected by the operation:

$$C_k \text{ received} = \frac{1}{T} \int_0^T y(t) \Psi_k^*(t) dt$$

20 wherein Ψ_k^* is the complex conjugate of $\Psi_k(t)$.

The above description considers only one time interval, from $[0-T]$. By performing identical operations

-3-

for other time intervals of equal length, the whole transmitted signal can be constructed and decoded by summing time-delayed versions of $x(t)$, but with different sets of data symbols, $C_k^{(m)}$, for different time intervals m .

As an example of how an OFDM signal may be constructed, let $N=4$ and consider the transmission of 8 data symbols over 2 time intervals $m=1$ and $m=2$. For purposes of explanation only the real portion of the data symbols will be considered. It is understood by those skilled in the art that the data representing a symbol consists of real and imaginary parts. The 8 data symbols $C_k^{(m)}$ can be defined as:

$$\begin{array}{cccc} C_0^{(1)}=1 & C_1^{(1)}=1 & C_2^{(1)}=-1 & C_3^{(1)}=-1 \\ C_0^{(2)}=1 & C_1^{(2)}=-1 & C_2^{(2)}=1 & C_3^{(2)}=1 \end{array}$$

Referring now to FIG. 1, therein are illustrated real and imaginary parts of two OFDM symbols with 8 data symbols being transmitted over 2 time intervals $m=1$ and $m=2$. Signal 300 is the summation of signals 302, 304, 306 and 308. The signals 302, 304, 306 and 308 represent each of the data signals at the subcarrier frequencies f_k , wherein $k=0, \dots, 3$, which comprise the composite signal 300. For example, if symbols $C_0^{(1)} = C_0^{(2)} = 1$ and, $C_1^{(m)}$, $C_2^{(m)}$ and $C_3^{(m)}$ are equal to zero, for $m=1$ and $m=2$, the transmitted signal would appear as signal 308 in FIG. 1.

The Fourier transform of $\Psi_k(t)$ is a $\sin(x)/x$ -shaped function centered at $f=f_k$. The frequency spectra of the different Ψ_k will therefore overlap. However, they are still orthogonal and in particular, where each spectra is maximum, the others are zero.

Referring now to FIG. 2, therein are illustrated the frequency spectra for $\Psi_k(t)$. Spectra are shown in FIG. 2 for $k=0, \dots, 7$, i.e., for $N=8$. From FIG. 2 it can be seen that by sampling the transmitted signal $x(t)$ at the frequencies f_k the individual data symbols can be retrieved without interference from other symbols.

-4-

The above description of OFDM assumes that there is only one user who is sending information on all N subcarriers. This would be the case in point to point systems such as modems or, in broadcast systems such as high definition television (HDTV). However, OFDM also has application to multiaccess telecommunications systems. In a typical multiaccess telecommunications system using OFDM, there would be many users in the same frequency band, sharing the frequency spectrum. A cellular system is a particular example of this type of system. In downlink (base station to mobile station) transmissions in a cellular system the base station can multiplex all users on different subcarriers. In the uplink (mobile station to base station) transmissions, each mobile station can be assigned a set of subcarriers less than the total number of subcarriers used by the particular base station in the link and can perform the construction of OFDM signals as described above.

Ideally, on an additive white Gaussian noise (AWGN) channel, the OFDM signal $x(t)$ can be transmitted and received without intersymbol interference (ISI). However, on a typical radio channel time dispersion and frequency dispersion (Doppler spread) effect the validity of the received signal. From FIG. 2 it is clear that Doppler spread would destroy the orthogonality of the subcarriers since the zero crossings of the individual subcarrier spectra would shift arbitrarily. This causes ISI between the data symbols transmitted on the different subcarriers. Additionally, from FIG. 2 it can be seen that there may be significant out of band interference caused by an OFDM system. For example, if the frequencies above f_c were allocated to a second system, there could be significant interference in that frequency band caused by the spectra of the subcarriers f_k of FIG. 2. The slower the spectra decays, the greater the interference.

Similarly, FIG. 1 indicates that time dispersion effects on the transmitted signal would create

-5-

interference between symbols in the adjacent time periods $m=1$ and $m=2$.

For single carrier systems the usual way to handle ISI is by utilizing an equalizer in the receiver. For OFDM systems, ISI is much simpler to handle because the symbol time T in OFDM systems is generally much longer than in single carrier systems. ISI between the data symbols carried on the different subcarrier frequencies can be reduced by proper choice of the symbol time T and thus subcarrier separation f_0 . ISI between time intervals can be avoided by introducing a guard time between time intervals in which the data symbols are transmitted. The guard time is introduced by a periodic extension of the transmitted signal $x(t)$ derived during an interval of length $T+t$, where t is the guard interval. With a guard time introduced, the received values are detected by the operation:

$$C_k \text{ received} = \int_t^{t+T} y(t) \Psi_k^*(t) dt$$

wherein $y(t)$ is the signal received. In this case $C_k = C_k \text{ received}$, for $k=0, 1, \dots, N-1$ (assuming the phase shift can be retrieved by e.g. a pilot signal), if the maximum time spread is less than the guard interval.

By using guard intervals as described above, interference between different blocks of data is avoided. The detection of one block does not take place until all remains of the previous block have disappeared from the channel. The guard intervals handle time delay as long as the guard intervals are longer than the longest time dispersion on the channel. However, if there is longer time dispersion, the orthogonality of the subcarriers is no longer preserved, resulting in a degradation of performance. Additionally, the use of guard intervals does not reduce Doppler spread effects on the received

-6-

signal out of band interference, and/or frequency synchronization errors.

It would provide an advantage then to have a method and system for use in an OFDM system that would desensitize the OFDM signal to time dispersion and also reduce the effects of Doppler spread on the received OFDM signal. Additionally, it would provide a further advantage if the method and system had the effect of reducing out of band interference.

SUMMARY OF THE INVENTION

The present invention provides a method and system of pulshaping for data transmission in an orthogonal frequency division multiplexed system (OFDM) that lessens the effects of both time dispersion and Doppler spread intersymbol interference (ISI) on the received OFDM signal. The present invention also reduces out of band interference in an OFDM system.

Conventional methods of reducing ISI involve introducing a guard time between the intervals in which the data symbols are transmitted. The guard time is introduced by a periodic extension of the transmitted signal for certain length of time. Use of a guard time does not, however, reduce interference between OFDM subcarriers caused by the effects of Doppler spread. The present invention provides an advantage over guard time in that both time dispersion and Doppler spread effects are reduced.

In the invention each of a plurality of data symbols having a symbol period T are modulated onto one of a plurality of subcarriers to generate a plurality of modulated subcarriers that comprise an OFDM data signal. The composite OFDM data signal is then multiplied by a pulshaping function before being transmitted on a system carrier over a system channel.

In an embodiment of the invention the pulshaping function may be a raised cosine pulse over the period T .

-7-

In this embodiment the rolloff factor of the raised cosine pulse determines the amount of reduction of ISI. The higher the rolloff factor, the greater the reduction in ISI. The frequencies of the subcarriers used are also
5 determined by the rolloff factor of the raised cosine pulse. The higher the rolloff factor, the greater the reduction in the number of subcarriers that can be used. With a constant frequency bandwidth available to a system, any reduction in the number of usable subcarriers caused
10 by pulseshaping can be weighed against the reduction in intersymbol interference (ISI), provided the rolloff factor used.

BRIEF DESCRIPTION OF THE DRAWINGS

15 FIG. 1 illustrates real and imaginary parts of two OFDM symbols;

FIG. 2 illustrates the frequency spectra for an OFDM signal;

20 FIG. 3A-3C illustrates the time domain pulse shape, the frequency response and the frequency response on an extended scale, respectively, for two pulseshaping functions;

25 FIGS. 4A and 4B show schematic block diagrams of a transmitter and receiver, respectively, of an OFDM system operating according to the teachings of the present invention;

FIG. 5 illustrates the frequency spectra for an OFDM signal resulting from pulseshaping performed according to the teachings of the present invention; and

30 FIGS. 6A and 6B illustrate the generation of data signals by cyclic extension circuitry and combiner circuitry, respectively, in an embodiment of the invention.

35 DETAILED DESCRIPTION OF THE INVENTION

Pulseshaping for data transmission in the present invention is accomplished by multiplying an OFDM signal

-8-

with a pulseshaping waveform $w(t)$ before the signal is transmitted on the OFDM channel. In the invention the transmitted OFDM signal $x(t)$ for each time period is given by:

$$x(t) = w(t) \sum_{k=0}^{N'-1} C_k \Psi_k(t)$$

5 and f_k is redefined in the invention as:

$$f_k = f_c + \frac{\alpha k}{T}, k=0, \dots, N'-1$$

where α is an frequency adjustment factor that depends on the pulseshaping function $w(t)$ used. If $y(t)$ is the received signal, the data can be detected at the receiver by the operation:

$$C_k \text{ received} = \frac{1}{T} \int_0^T y(t) \Psi_k^*(t) dt$$

10 Referring now to FIGS. 3A, 3B and 3C, therein are shown the time domain pulse shape, the frequency response and, the frequency response on an extended scale, respectively, for two examples of pulseshaping functions $w_1(t)$ and $w_2(t)$. For comparison purposes, the responses
15 of a channel using no pulseshaping are also illustrated in FIGS. 3A, 3B and 3C. The time and frequency scales are normalized for symbol time T and subcarrier frequency $f_c=0$. The pulseshaping functions are defined as raised cosine pulses with a rolloff factor B of $\frac{1}{2}$ for $w_1(t)$ and
20 1 for $w_2(t)$. The raised cosine pulse is given by:

$$w(t) = \frac{1 - \cos 2\pi t / TB}{2}, 0 \leq t < \frac{T}{2} B$$

-9-

and,

$$w(t)=1, \quad \frac{TB}{2} \leq t < T - \frac{TB}{2}$$

$$w(t) = \frac{1 - \cos(2\pi(T-t)/TB)}{2}, \quad T - \frac{TB}{2} < t \leq T, \quad \text{for } 0 < B \leq 1,$$

5 The pulse duration T of all three cases is the same in FIG. 3A.

FIG. 3A shows that use of pulseshaping by multiplying $x(t)$ by the pulseshaping function $w_1(t)$ or $w_2(t)$, on the interval $0 \leq t < T$ will attenuate the first and last portions of the signal $x(t)$ since the amplitude of $w_1(t)$ and $w_2(t)$ rises slowly at the beginning and decays at the end of the period T . This will reduce sensitivity when portions of OFDM symbols from different time periods overlap due to time dispersion. When no pulseshaping is used, the signal $x(t)$ is not attenuated over the period T .

15 In FIGS. 3B and 3C the decay rate of the spectral density in the frequency responses of the pulseshaping functions $w_1(t)$ and $w_2(t)$ are much greater than that of a channel when no pulseshaping is used. The decay rate depends directly on the rolloff factor B . After multiplication, the faster spectral decay of the pulseshaping causes each subcarrier of the transmitted signal $x(t)$ to be less sensitive to Doppler spread than the subcarrier would be without pulseshaping. The faster spectral decay rate also results in a total system baseband with a fast spectral decay rate This will reduce out of band interference.

-10-

FIGS. 3B and 3C also show that the spectra of
 pulseshaping functions are wider, depending on the rolloff
 factor B, than the spectra of the frequency response of
 a channel when no pulseshaping is used. For example, the
 5 spectra of $w_2(t)$ with a B of 1 has a width of twice the
 spectra of the frequency response of a channel when no
 pulseshaping is used. Setting B equal 0 is equivalent to
 using no pulseshaping at all and results in the spectra
 shown for no pulseshaping. The change in spectra when
 10 using pulseshaping changes the orthogonality relationships
 of the subcarriers within a particular frequency band.
 Therefore, using a particular pulseshaping function may
 require adjustment in the choice of subcarriers chosen in
 order to maintain orthogonality during data transmission.
 15 The frequency adjustment factor α is used for this
 adjustment. α is defined as:

$$\frac{2}{2-B}$$

As an example of subcarrier frequency adjustment, if
 the pulseshaping function $w_2(t)$ comprising the Hanning
 function is used the pulse shaping function can be defined
 20 as:

$$w_2(t) = \frac{1 - \cos(2\pi t/T)}{2}, \quad 0 \leq t \leq T$$

For the Hanning function $B=1$ and $\alpha=2$. In the
 invention the subcarrier frequencies are defined as:

$$f_k = f_c + \frac{2k}{T}, \quad k=0, \dots, \frac{N}{2}-1,$$

Therefore, for a given bandwidth, every second subcarrier,
 as compared to conventional OFDM, is utilized to transmit
 25 the set of data symbols defined by $C_k^{(m)}$. Each symbol C_k
 is transmitted on the subcarrier having a frequency f_k as
 defined above. The transmitted signal $x(t)$ is then:

-11-

$$x(t) = w(t) \sum_{k=0}^{\frac{N}{2}-1} C_k \Psi_k(t) dt$$

If $y(t)$ is the received signal, the transmitted data can be recovered at the receiver by the operation:

$$C_k \text{ received} = \frac{1}{T} \int_0^T y(t) \Psi_k^*(t) dt$$

5 Referring now to FIG. 5 therein is illustrated the frequency spectra for $w(t)\Psi_k(t)$ wherein $k=0, 1, 2, 3$. From FIG. 5 it can be seen that by sampling the transmitted signal $x(t)$ at the frequencies f_k the individual data symbols can be retrieved without interference from other signals.

10 The frequency spectra shown in FIG. 5 shows the faster spectral decay rate of the subcarriers f_0, f_1, f_2 , and f_3 that results from the pulseshaping. When compared to conventional OFDM, for example, as shown in FIG. 2, it is evident that Doppler spread sensitivity between
15 subcarriers will be reduced. It is also evident that out of band interference will be reduced because of the more rapid decay of the spectral density.

For a fixed given bandwidth, the pulseshaping of the invention requires less data symbols per unit time than
20 conventional OFDM in which every available orthogonal subcarrier is used.

An embodiment of the invention which uses the pulseshaping function represented by a raised cosine pulse will now be described.

25 Referring now to FIGS. 4A and 4B, therein are shown schematic block diagrams of a transmitter 400 and receiver 430, respectively, of an OFDM system operating according to the teachings of the present invention. Transmitter

-12-

400 and receiver 430 are one of many possible hardware configurations for implementing the invention. In this embodiment OFDM symbol period T and the number of time samples N transmitted in each period T are kept constant as compared to the above described conventional OFDM. The number N' of data symbols C_k transmitted per OFDM symbol decreases as a result of pulseshaping. In the embodiment of the invention the number N' of data symbols C_k transmitted equals the number N' of subcarriers used and is defined as $N'=N/\alpha$.

The transmitter 400 includes a serial to parallel converter 402, inverse fast fourier transform (IFFT) circuitry 404, cyclic extension circuitry 405, pulseshaping multipliers 406, an N to 1 multiplexer (Mux) 408, a digital to analog converter (DAC) 410 and a modulator 412. In transmitter operation, serial to parallel converter 402 converts a serial digital data stream 416 containing N' data symbols C_k , $k=0, \dots, N'-1$, into one OFDM block (OFDM symbol). The N' data symbols C_k comprising the OFDM block are then input into IFFT circuitry 404. Each symbol C_k is input to the input associated with the subcarrier having the frequency f_k . The outputs for $k=0, \dots, N'-1$ of IFFT circuitry 404 are now each represented by:

$$z_n = \sum_{k=0}^{N'-1} C_k e^{j2\pi kn/N'}, \quad n=0, 1, \dots, N'-1$$

The output of the N' -point IFFT (signals wherein z_n , $n=0, \dots, N'-1$) represents time series signal carrying the data it is desired to transmit. Because in this embodiment of the invention the OFDM symbol time (FFT frame) T and number of time samples N in each period T remain constant for a given frequency bandwidth, a cyclic extension is performed on the signal z_n in cyclic

-13-

extension circuitry 405 to generate a signal a_n having N samples over the time period T .

In the cyclic extension circuitry 405, a number of first consecutive signals of the series z_n are placed at the end of the time discrete series a_n , and a number of the last consecutive signals of the series z_n are placed at the beginning of the time discrete series a_n . The signal a_n is defined by:

$$a_n = z_{(n - (N - N') / 2 \bmod N')}, \quad n = 0, 1, \dots, N-1$$

Referring now to FIG. 6A, therein is illustrated the function performed by cyclic extension circuitry 405. FIG. 6A illustrates an example in which the number N of the samples in each OFDM symbol equals 10 and, the number N' of data symbols C_k equals 6.

In order to perform pulseshaping in the time domain, the time series signal a_n is multiplied in the pulseshaping multipliers 406 by the appropriate constants w_n , $n = 0, \dots, N-1$, from the time discrete pulseshaping function, having a chosen rolloff factor B , to generate the values x_k , $k = 0, \dots, N-1$. The time discrete pulseshaping function is defined as:

$$w_n = \frac{1 - \cos(2\pi n / NB)}{2}, \quad 0 \leq n < \frac{N}{2}B$$

$$w_n = 1, \quad \frac{NB}{2} \leq n < N - \frac{NB}{2}$$

$$w_n = \frac{1 - \cos(2\pi (N - n) / NB)}{2}, \quad N - \frac{N}{2}B \leq n < N,$$

The discrete outputs x_n, \dots, x_{N-1} are then time multiplexed through Mux 408 to form the discrete time series represented by the equation:

-14-

$$x_n = w_n \sum_{k=0}^{N-1} C_k e^{j2\pi k l / N}, n=0, \dots, N-1$$

where $l = (n - (N - N')/2) \bmod N'$. The discrete time series x_n is then input to DAC 410 where it is converted to an analog waveform $x(t)$. The analog waveform $x(t)$ is then input to modulator 412 where the analog waveform 418 is modulated
 5 onto the system RF carrier at f_c and transmitted on the system RF channel 414.

Receiver 430 includes demodulator 432, analog to digital converter (ADC) 434, serial to parallel converter 436, combiner circuitry 438, fast fourier transform (FFT)
 10 circuitry 440 and serial to parallel converter 442. In receiver operation, the system RF carrier is received on the system RF channel 414 and demodulated from the system RF carrier at demodulator 432 to obtain the received analog waveform $b(t)$ which is the received version of the transmitted waveform $x(t)$. The analog waveform $b(t)$ is
 15 then input to ADC 434 where it is converted to a discrete time series signal b_n . The discrete time series signal b_n is then input to serial to parallel converter 436 and converted into a parallel data signal. The parallel data signal is then input to combiner circuitry 438. The combiner circuitry 438 combines the N samples of b_n into
 20 N' samples to form a discrete time series signal y_n . In the combiner circuitry 438 the discrete time series b_n is processed to generate the discrete time series y_n , for
 25 $n=0, \dots, N'-1$. The signal y_n is defined by:

$$y_n = b_{n + (N - N')/2} + b_{n + (N + N')/2} + b_{n + (N - 3N')/2}$$

Referring now to FIG. 6B, therein is illustrated the function performed by combiner circuitry 438. FIG. 6 illustrates the example of combining the signal b_n where
 30 $N=10$ and $N'=6$. b_n is the received version of the

-15-

transmittal signal a_n formed in the example illustrated in FIG. 6A.

Y_n is then input to the FFT circuitry 440. An FFT is then performed on the N' samples of the discrete time signal y_n to retrieve the transmitted data symbol C_k received where:

$$C_k \text{ received} = \frac{1}{N'} \sum_{n=0}^{N'-1} y_n e^{-j2\pi kn/N'}, k=0, \dots, N'-1$$

The data symbols, C_k received of the OFDM block, are then input to parallel to serial converter 442 where they are converted into serial data 444.

The identical process is repeated in transmitter 400 and receiver 430 for each OFDM block (OFDM symbol) of N' data symbols that are to be transmitted.

While utilizing the raised cosine function for pulsedshaping reduces the number of usable frequencies by a factor of α , as compared to an OFDM system without pulsedshaping having the same frequency band, the method and system of the invention is flexible and allows for alternate embodiments in which different pulsedshaping functions are used. For example, the raised cosine function known or the time discrete Hanning function, in which $B=1$ and $\alpha=2$, may be used in the embodiment of the invention in FIGS. 4A and 4B. The time discrete Hanning function is defined as:

$$w_n = \frac{1 - \cos(2\pi n/N)}{2}$$

Using the Hanning function for pulsedshaping reduces the number of usable subcarrier frequencies by a factor of 2. As the rolloff factor B of the pulsedshaping function chosen moves from 1 toward 0, the number of usable frequencies increases while the spectral decay rate and ISI immunity decreases.

-16-

By choosing a particular pulseshaping function, the number of usable frequencies can be increased by trading off speed in the rate of spectral decay. The particular pulseshaping function used may be chosen according to the requirements of the particular system in which the invention is implemented. For example, FIGS. 3B and 3C show that for the pulseshaping function given by $w_1(t)$, which has a rolloff factor B of $\frac{1}{2}$, the number of usable frequencies decreases by a factor of one and a half, as opposed to a factor of two when B equals one. However, the lower B results in less ISI immunity.

While the embodiment described uses the raised cosine function as the pulseshaping function, other types of pulseshaping functions may also be used. The critical factor is that the pulseshaping function have a portion of its amplitude less than its maximum amplitude so that the transmitted waveform is shaped by the pulseshaping.

As can be seen from the above description, the invention provides a method and system of pulseshaping for data transmission in an OFDM system. Use of the invention will enhance the performance of OFDM systems into which it is implemented. Performance is enhanced by the reduction of intersymbol interference (ISI) between data symbols that is caused by Doppler spread. Performance is also enhanced by the reduction of ISI between OFDM symbols in different time periods that is caused by time dispersion effects. Use of the invention also reduces out of band interference.

It is believed that the operation and construction of the present invention will be apparent from the foregoing description and, while the invention shown and described herein has been characterized as a particular embodiment, changes and modifications may be made therein without departing from the spirit and scope of the invention as defined in the following claims.

-17-

WHAT IS CLAIMED IS:

1. In a telecommunications system in which communications between a transmitter and a receiver are carried on a plurality of subcarriers over a communications channel on a system carrier, a method of transmitting data over said communications channel, said method comprising the steps of:

modulating each of a plurality of data symbols onto one of a plurality of subcarriers to generate a plurality of modulated subcarriers, said modulated subcarriers comprising a first data signal;

multiplying said first data signal by a pulseshaping waveform to generate a second data signal, said pulseshaping waveform comprising a function having at least one first and second amplitude wherein said first amplitude is greater than said second amplitude; and

transmitting said second data signal on said system carrier.

2. The method of claim 1 in which said system carrier has a frequency f_c and said step of modulating comprises:

modulating each of a plurality of data symbols C_k , having a symbol period T , onto a subcarrier having a frequency f_k , for $k=0, \dots, N'-1$, wherein $f_k = f_c + \alpha k/T$ and α is a constant greater than 1, said modulated subcarriers comprising said first data signal.

3. The method of claim 2 further comprising the steps of:

receiving a third data signal $y(t)$ at a receiver, said third data signal comprising said second data signal after transmission on said system carrier; and

-18-

detecting said set of data symbols C_k , $k=0, \dots, N'-1$, at said receiver.

4. The method of claim 2 wherein said pulseshaping waveform comprises a raised cosine pulse having a
5 predetermined rolloff factor.

5. The method of claim 4 wherein said pulseshaping waveform comprises a Hanning function.

10 6. The method of claim 1 in which said step of modulating comprises:

performing an N' -point inverse fast fourier transfer (IFFT) on a plurality of data symbols to generate said first data signal.

15

7. The method of claim 6 in which said step of multiplying comprises:

cyclicly extending said first data signal to generate an extended data signal; and

20

multiplying said extended data signal by a time discrete pulseshaping function to generate said second data signal.

8. The method of claim 7 further comprising the steps of:

25

receiving a third data signal at a receiver, said third data signal comprising said second data signal after transmission on said communication channel;

30

combining said third data signal to generate a fourth data signal; and

performing an N' -point fast fourier transform (FFT) on said fourth data signal to generate said set of data symbols.

35

9. The method of claim 7 wherein said pulseshaping function comprises a time discrete raised cosine function having a predetermined rolloff factor.

-19-

10. The method of claim 9 wherein said pulseshaping function comprises a time discrete Hanning function.

11. The method of claim 1 in which said system carrier has a frequency f_c , and said step of modulating comprises:

performing an N' -point inverse fast fourier transform (IFFT) on said data symbols, said data symbols comprising a plurality of symbols C_k , $k=0, \dots, N'-1$, each having a symbol period T , to generate a first data signal, said first data signal comprising a signal z_n comprising N' time discrete values each of said time discrete values being associated with a frequency f_k , for $k=0, \dots, N'-1$, in the frequency domain, where $f_k = f_c + \alpha k/T$ and α is a constant greater than one.

12. The method of claim 11 in which said step of multiplying comprises:

cyclicly extending said first data signal z_n over said symbol period T to generate an extended data signal a_n comprising N time discrete values; and multiplying said extended data signal a_n by a time discrete pulseshaping function $w_n = w_0, w_1, \dots, w_{N-1}$, over said period T to generate said second data signal $x_n = w_n a_n$, $n=0, \dots, N-1$, said pulseshaping function having a first amplitude w_{n1} , and a second amplitude w_{n2} , wherein said first amplitude is greater than said second amplitude.

13. The method of claim 12 further comprising the steps of:

receiving a third data signal b_n at a receiver, said third data signal comprising said second data signal x_n after transmission on said communications channel;

-20-

combining said third data signal b_n over said symbol period T to generate a fourth data signal y_n comprising N' time discrete values; and

5 performing an N' -point fast fourier transform (FFT) on said fourth data signal y_n to generate said set of data symbols C_k , $k=0, \dots, N'-1$.

14. The method of claim 12 wherein said pulseshaping function w_n comprises a time discrete raised cosine function having a predetermined rolloff factor.

15. The method of claim 14 wherein said pulseshaping function w_n comprises a time discrete Hanning function.

16. An apparatus for transmitting data in a telecommunications system in which communications between a transmitter and a receiver are carried on a plurality of subcarriers over a communications channel on a system carrier, said apparatus comprising:

20 inverse fast fourier transform (IFFT) circuitry for performing an IFFT on a plurality of data symbols and generating a first data signal;

a multiplier for multiplying said first data signal by a pulseshaping function in the time domain to generate a second data signal; and

25 a transmitter for transmitting said second data signal on said communications channel.

17. The apparatus of claim 16 wherein said multiplier comprises:

30 cyclic extender circuitry for cyclically extending said first data signal to generate an extended signal; and

35 a multiplier for multiplying said extended signal by a pulseshaping function in the time domain to generate said second data signal.

-21-

18. The apparatus of claim 16 wherein said plurality of data symbols comprises a first plurality of data symbols, and said apparatus further comprises:

5 a serial to parallel converter for converting a serial digital data stream into said first plurality of data symbols.

10 19. The apparatus of claim 16 wherein said plurality of data symbols comprises a plurality of data symbols C_k , $k=0, \dots, N'-1$, each having a symbol period T , and said first data signal comprises a signal z_n comprising N' time discrete values, each of said time discrete values being associated with a frequency f_k , for $k=0, \dots, N'-1$, in the frequency domain, where $f_k=f_c+\alpha k/T$ and α is a constant
15 greater than one.

20. The apparatus of claim 19 wherein said multiplier comprises:

20 cyclic extender circuitry for cyclically extending said first data signal z_n to generate an extended signal a_n comprising N discrete time values; and

25 a multiplier for multiplying said extended signal a_n by a pulseshaping function in the time domain over said period T to generate said second data signal.

30 21. The apparatus of claim 20 wherein said multiplier comprises a multiplier for multiplying said extended signal a_n by a pulseshaping function $w_n=w_0, w_1, \dots, w_n$, over said period T to generate said second data signal, said second data signal comprising a signal $x_n=w_n a_n$, $n=0, \dots, N-1$, and said pulseshaping function having at least a first amplitude w_{n1} and second amplitude
35 w_{n2} , wherein said first amplitude is greater than said second amplitude.

-22-

22. The apparatus of claim 21 wherein said multiplier comprises a plurality of multipliers, each of said multipliers for multiplying a value a_n of said extended signal by the corresponding value w_n in the time domain to generate said second data signal.

23. The apparatus of claim 21 wherein said pulseshaping function comprises a time discrete raised cosine pulse.

24. The apparatus of claim 23 wherein said pulseshaping function comprises a Hanning function.

25. An apparatus for receiving data in a telecommunications system in which communications between a transmitter and a receiver are carried on a plurality of subcarriers over a communications channel on a system carrier, said apparatus comprising:

a receiver for receiving a first data signal transmitted on said communications channel and providing a second data signal;

combiner circuitry for combining said second data signal to generate a combined signal; and

fast fourier transform (FFT) circuitry for performing an FFT on said combined signal y_n and generating a plurality of data symbols.

26. The apparatus of claim 25 wherein said receiver comprises a receiver for receiving said first data signal and a serial to parallel converter for converting said first data signal into said second data signal.

27. The apparatus of claim 25 further comprising a parallel to serial converter for converting said plurality of data symbols into serial data.

-23-

28. The apparatus of claim 25 wherein said second data signal comprises a signal b_n comprising N discrete time values and said combiner circuitry comprises circuitry for combining said second data signal b_n to
5 generate said combined signal, said combined signal comprising a signal y_n comprising N' discrete time values.

29. The apparatus of claim 28 wherein said system carrier has a frequency f_c and, said fast fourier transform circuitry comprises circuitry for performing an
10 FFT on said combined signal y_n and generating a plurality of data symbols C_k , $k=0, \dots, N'-1$, each of said time discrete values of y_n being associated in said FFT with a frequency $f_k=f_c+\alpha k/T$ and α is a constant greater than one.
15

30. The apparatus of claim 29 wherein said receiver further comprises a serial to parallel converter for converting said first data signal into said second data signal.
20

31. The apparatus of claim 29 further comprising a parallel to serial converter for converting said plurality of data symbols C_k into serial data.

1 / 5

FIG. 1


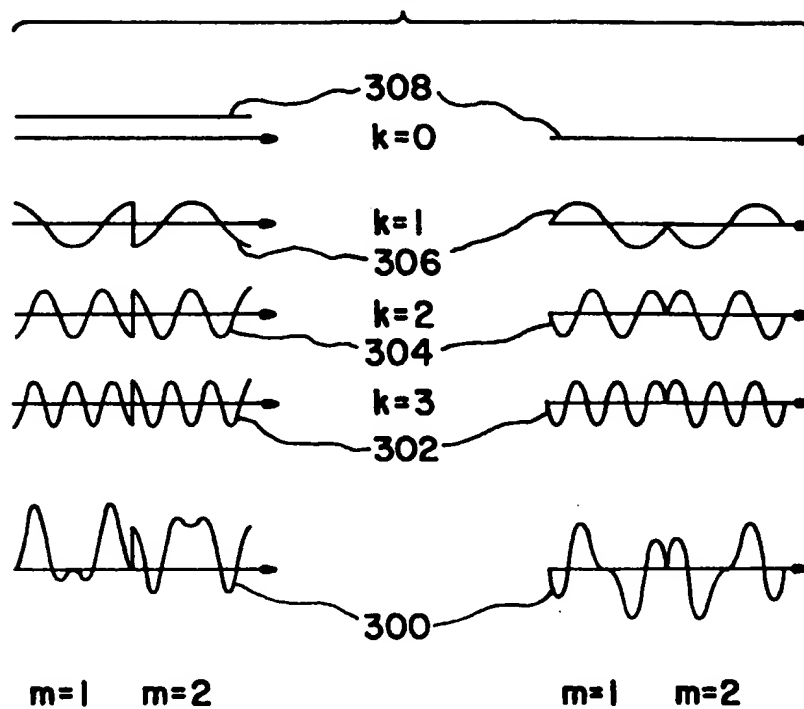


FIG. 2

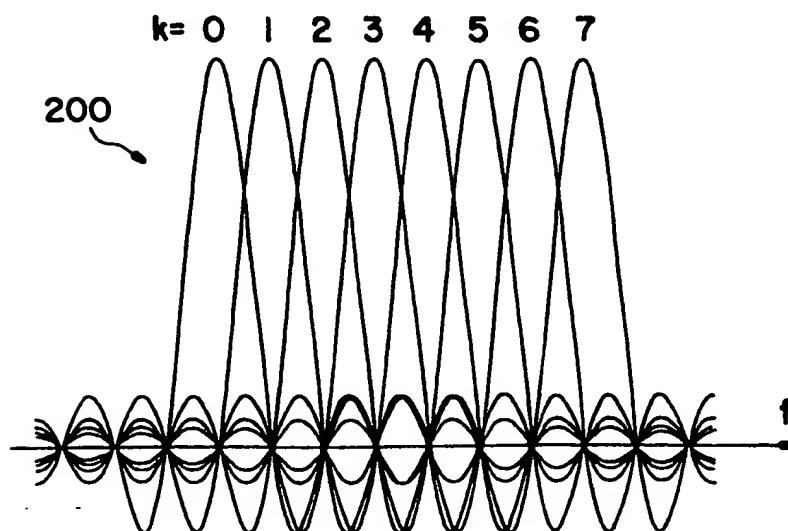

2 / 5

FIG. 3A

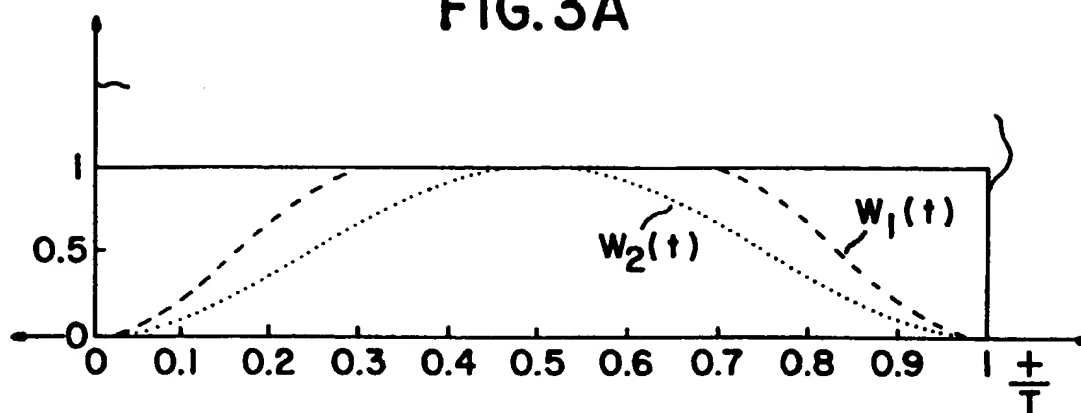


FIG. 3B



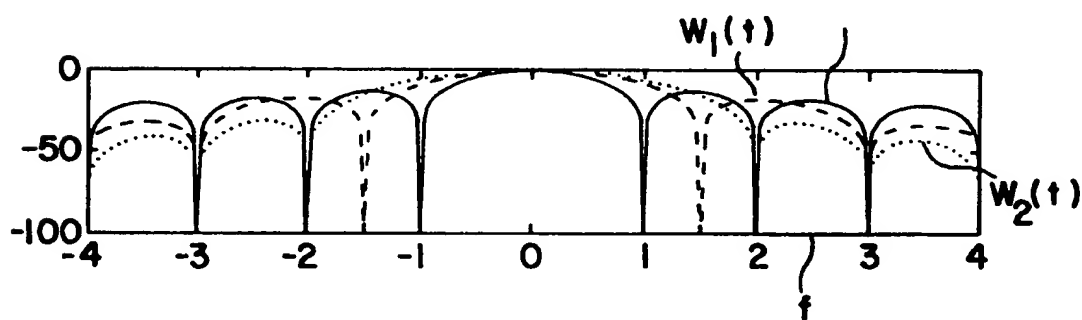


FIG. 3C

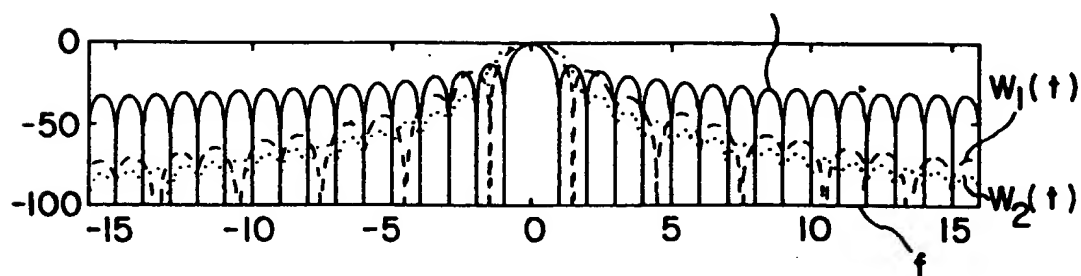


3 / 5

FIG. 4A

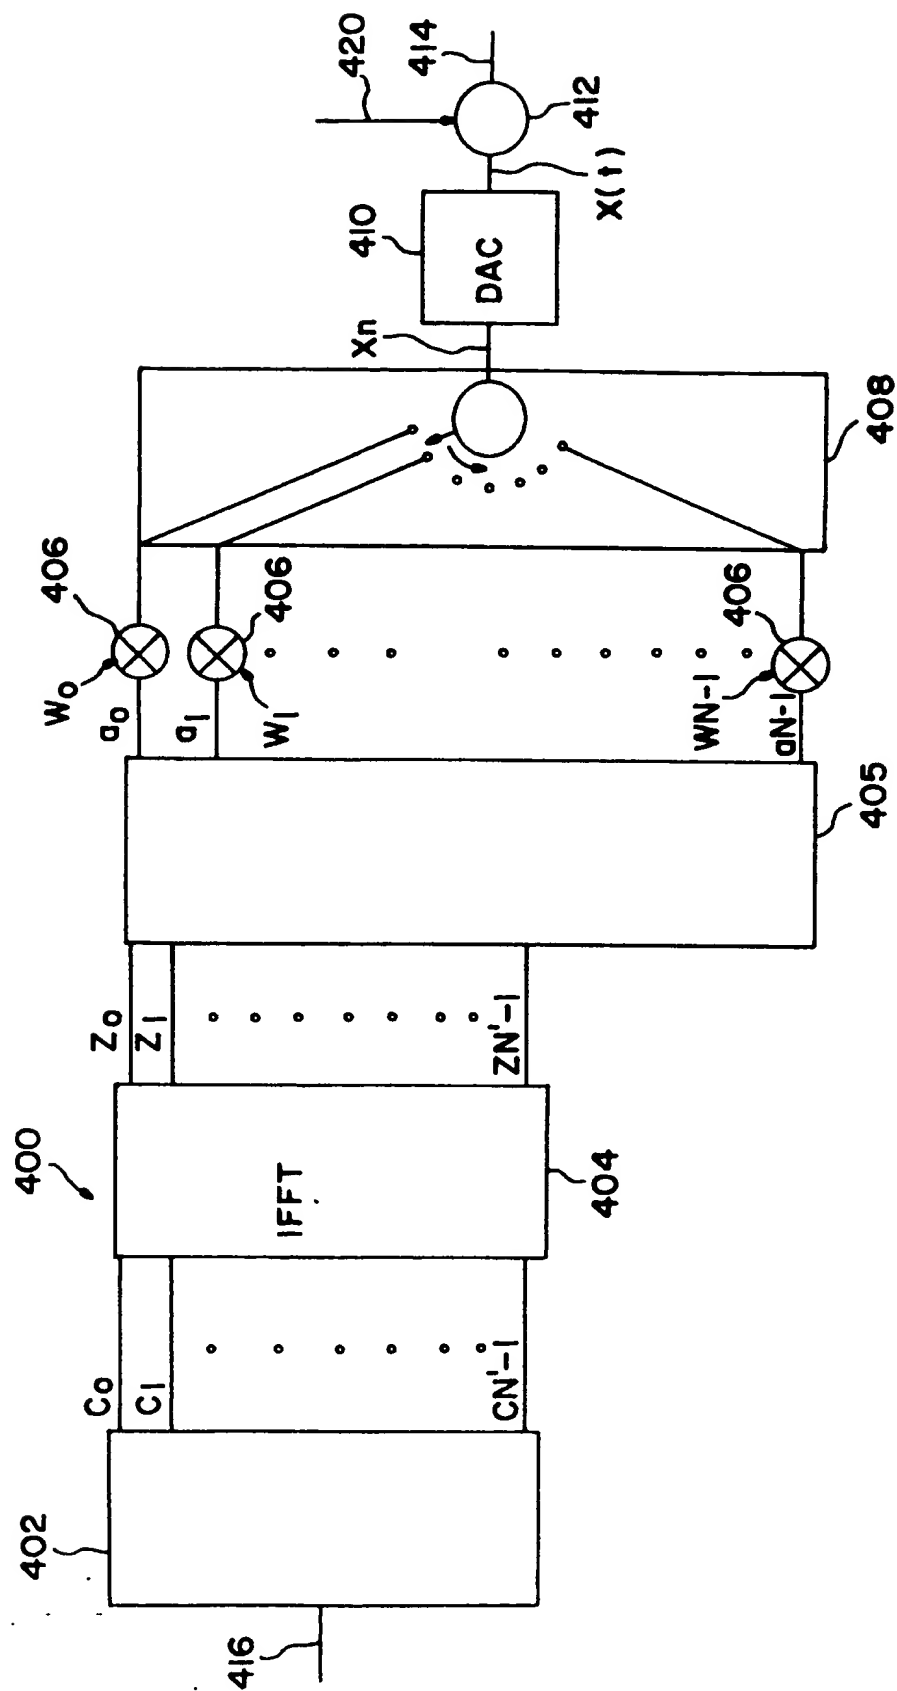

4 / 5

FIG. 4B

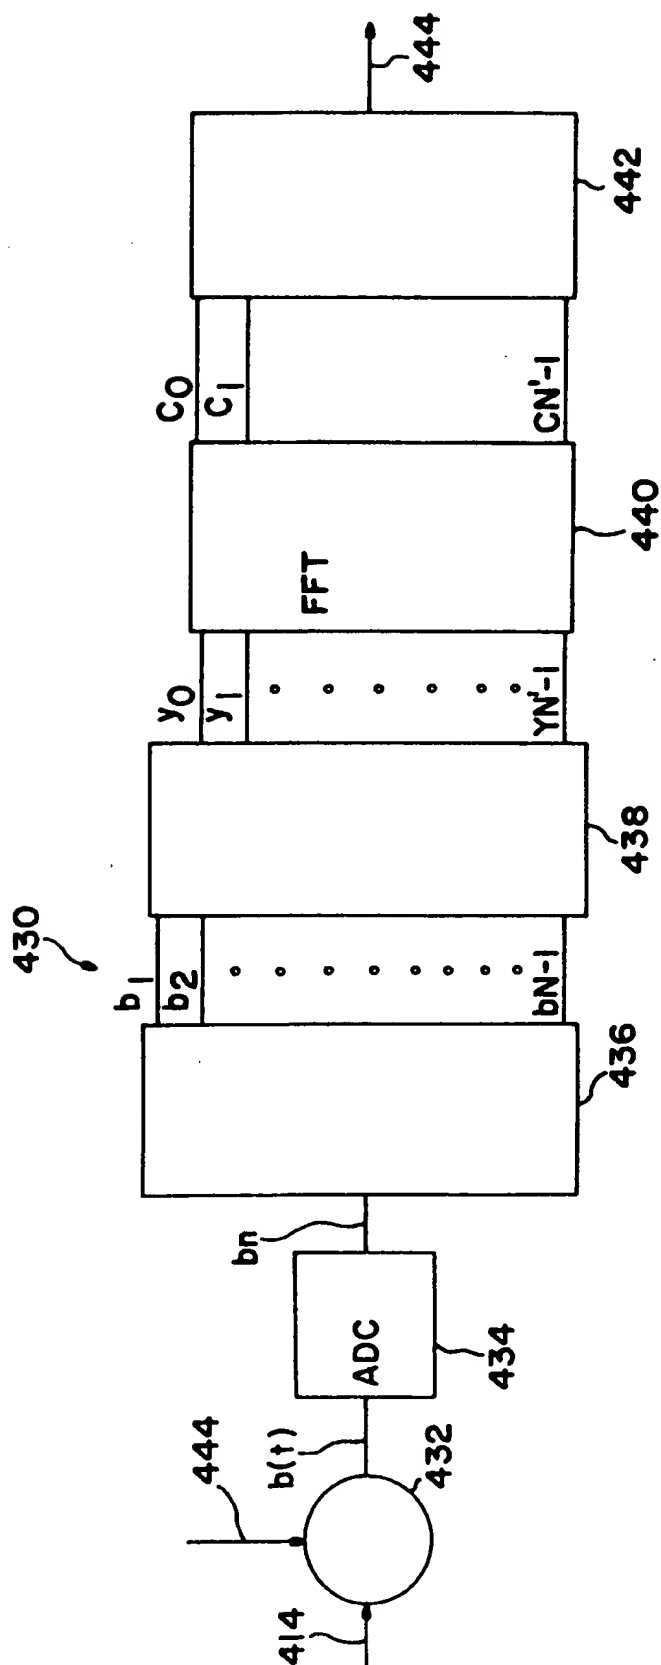

5 / 5

FIG.5

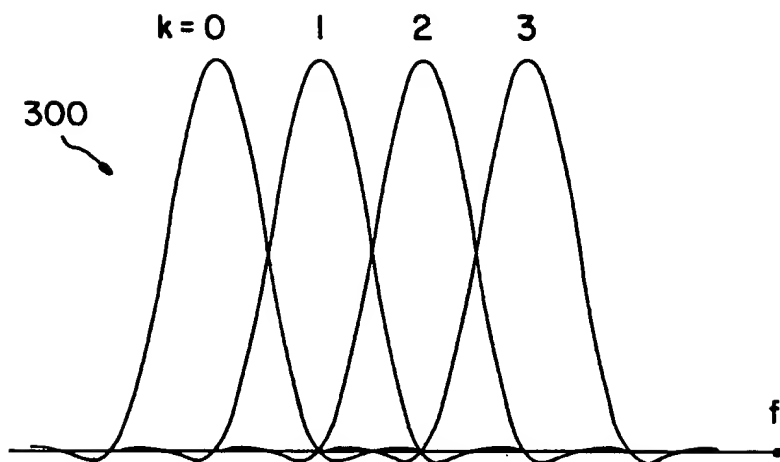


FIG.6A


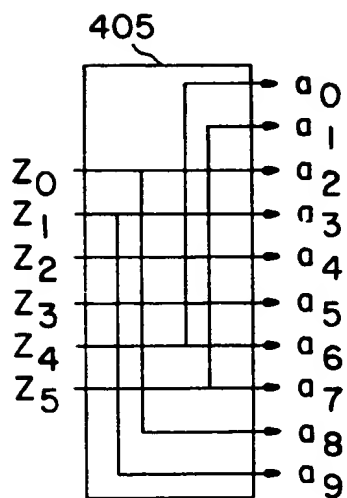


FIG.6B

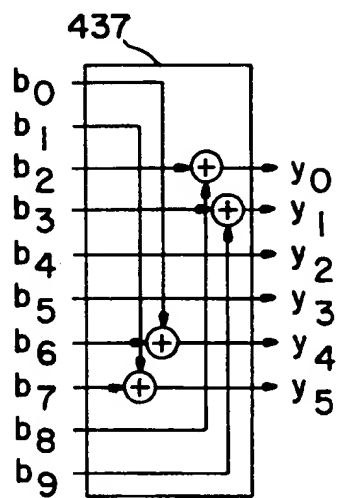

INTERNATIONAL SEARCH REPORT

International Application No
PCT/JP 96/00906

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L27/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 441 732 A (FRANCE ETAT ;TELEDIFFUSION DE FRANCE) 14 August 1991 see abstract; figure 3 see column 5, line 40 - line 60 --- -/--	1-31

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* "&" document member of the same patent family

Date of the actual completion of the international search

22 November 1996

Date of mailing of the international search report

11.12.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Scriven, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 96/00906

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PROCEEDINGS OF THE GLOBAL TELECOMMUNICATIONS CONFERENCE (GLOBECOM), SAN FRANCISCO, NOV. 28 - DEC. 2, 1994, vol. 1, 28 November 1994 - 2 December 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 258-262, XP000488554 VAHLIN & HOLTE: "OPTIMAL FINITE DURATION PULSES FOR OFDM" see abstract; figures 3-5 see page 259, right-hand column, paragraph 3 - page 260, left-hand column, paragraph 1 see page 261, left-hand column, paragraph 4	1-31
A	--- US 4 783 754 A (BAUCK & HECHT-NIELSEN) 8 November 1988 see abstract -----	1-31

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 96/00906

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0441732	14-08-91	FR-A- 2658018	09-08-91
		DE-D- 69109323	08-06-95
		DE-T- 69109323	04-01-96
		US-A- 5357502	18-10-94

US-A-4783754	08-11-88	NONE	
